

# No-Clad™


## Aluminium Foil tape

Thermobreak® No-Clad Foil Tape is a specially developed UV, salt water resistant aluminium foil tape designed to handle outdoor conditions and ensure the integrity of the Thermobreak® No-Clad insulation system.

The special weather resistant adhesive has exceptional initial tack to provide quick installation on all Thermobreak No-Clad insulation joints.

### Construction

UV resistant coating/aluminium foil/PE weave reinforcement/pressure sensitive adhesive/silicone coated release liner.

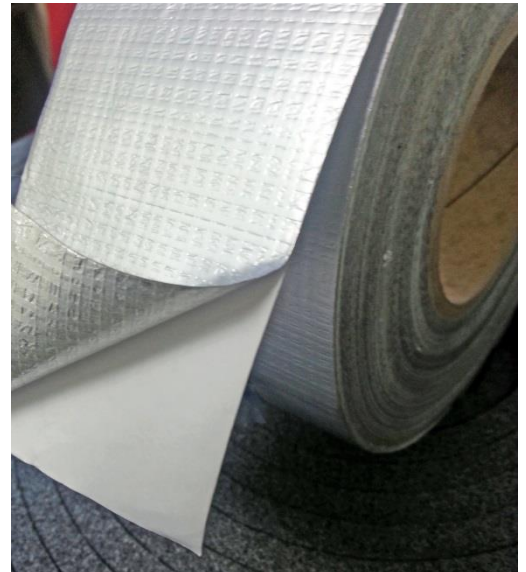

### Technical Specifications

| Property               | Typical Value                 | Test Method          |
|------------------------|-------------------------------|----------------------|
| Foil Thickness         | 9 micron                      | Internal             |
| Tensile Strength       | 106 N/25mm MD<br>77 N/25mm CD | ISO 1421             |
| Elongation             | 35.8% MD<br>48.4% CD          | ISO 1421             |
| Adhesive Thickness     | 150 micron                    | Internal             |
| Initial Tack           | 1.7 cm                        | PSTC 6               |
| Adhesion to Steel      | 1.3 kg/25mm                   | PSTC 3               |
| Holding Power          | > 24 hours                    | PSTC 7               |
| UV Resistance          | Excellent                     | ISO 4892-3           |
| Flammability           | Class 0                       | BS 476 Parts 6 and 7 |
| Water Vapour Permeance | < 2.9 ng/Ns                   | ASTM E96             |

### Size & Packaging

72 mm wide x 50m long

8 rolls / box

**SEKISUI**

#### Australia Plant :

1-5 Parraweena Rd, Taren Point NSW 2229 Australia  
PO Box 2898, Taren Point NSW 2229 Australia  
Web Address : [www.pilon.com.au](http://www.pilon.com.au)  
Tel: +61 2 9525 9880  
Fax: +661 2 9525 8004

**FOAM  
INTERNATIONAL**  
Global Foam Solutions

#### Thailand Plant :

700/329 Moo 6, Amata Nakorn Industrial Estate,  
Tumbol Donhua-loh, Amphur Muang Chonburi 20000  
Thailand  
Tel: +66 3821 3219 ~ 26  
Fax: +66 3821 3281

